

CCCV4805, CCCV4812, CCCV4824  
product photography

## Product description

The CCCV48XX is a constant current constant voltage digital DIN Rail buck converter with perfect output stability. It's a powerful tool to provide additional lower output voltages in control cabinets. The input voltage ranges from 8V (min.  $0.9 U_{out}$ ) to 50V. For more power, outputs can be paralleled using a diode. Output voltages and currents are factory digitally programmable. The input voltage must always be higher than the output voltage.

All devices feature a universal RGB led, indicating, constant voltage, constant current, undervoltage lockout and overtemperature.

The device is resilient to typical operating failures: Input reverse polarity, output short circuit, open circuit, moderate input transients.

It operates between  $-40^{\circ}\text{C}$  und  $50^{\circ}\text{C}$ . A derating over temperature is required.

## Ordering information

Ordercode	Description
CCCV4805	$U_{out} = 5\text{V}$
CCCV4812	$U_{out} = 12\text{V}$
CCCV4824	$U_{out} = 24\text{V}$
Customisation available. Contact DPS.	

## Feature summary

- Constant Current Constant Voltage
- 90% typical efficiency (94% peak)
- Factory Programmable output voltage range (0 V .. 30 V)
- Factory Programmable output current range (0 A to 4 A)
- Output paralleling possible with diodes
- Wide input voltage (8 V to 50 V)
- Internal temperature monitoring with Thermal Shutdown
- Factory programmable with various parameters.
- Input reverse polarity protection
- Output short circuit proof

## Specification overview

Description	Value
<b>General</b>	
Input Voltage Range	8 - 50 V
Max. Output Voltage	$U_{in} - 2\text{V}$
Max. Output Current	4A
Typical Efficiency	90 %
Control Strategy	CCCV
Indicator	RGB LED
<b>Protection</b>	
Input Fuse	yes
Input Reverse polarity protection	yes
Short circuit protection	yes
Input Overvoltage supressor	TVS

## Engineering standards

Applied engineering standards	
IEC 55032	IEC 61000-4-2
IEC 61000-4-3	IEC 61000-4-4
IEC 61000-4-5	IEC 61000-4-6
IEC 61000-4-7	IEC 61000-4-8



## 1 Functional description

### 1.1 Overview

The CCCX48XX is a constant current constant voltage digital DIN Rail buck converter with perfect output stability. It's a powerful tool to provide additional lower output voltages in control cabinets. The input voltage ranges from 8V (min. 0.9 Vout) to 50V. For more power, outputs can be paralleled using a diode. Output voltages and currents are factory digitally programmable. The input voltage must always be higher than the output voltage.

All devices feature a universal RGB led, indicating, constant voltage, constant current, under-voltage lockout and overtemperature.

The device is resilient to typical operating failures: Input reverse polarity, output short circuit, open circuit, moderate input transients.

It operates between -40°C und 50°C. A derating over temperature is required.

### 1.2 Output Paralleling

For increased output power, outputs can be easily paralleled with an output diode. Operation without an output diode is not possible. Fitting output diodes modules are available from DPS. The Constant Current Constant Voltage behavior of the power supply ensures stable operation. For paralleling, identical supplies of the same partnumber must be used.

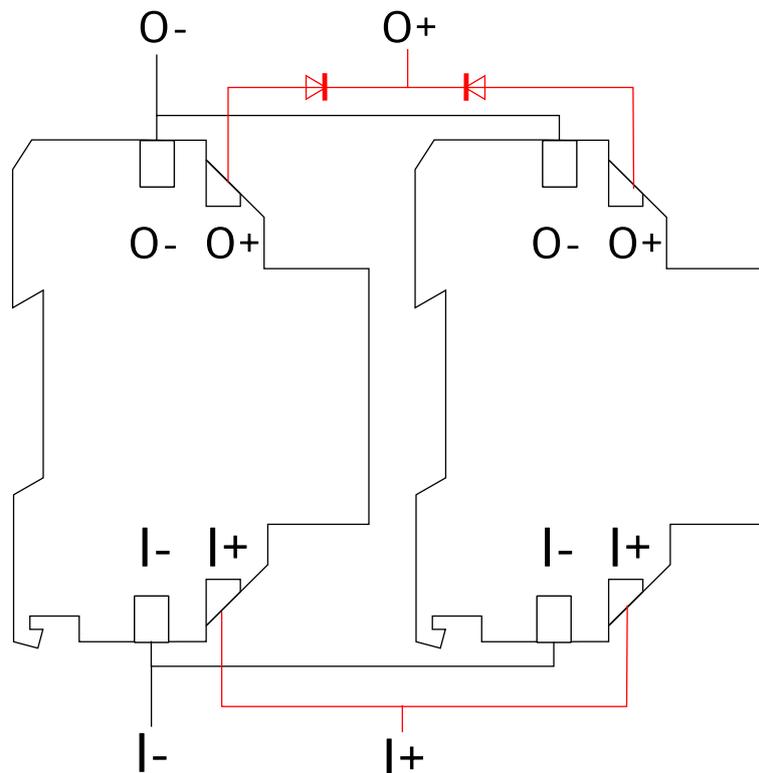


Figure 1: For output paralleling, two output diodes on the O+ Pins have to be inserted. By that, also redundancy can be achieved.





## 1.3 Protections

The following output protections are in place:

- **Input Reverse polarity:** The input may be connected in reverse polarity with an input of  $U_{in,max} = -48\text{ V}$ .
- **Programmable Input Voltage Lockout:** The input voltage lockout (UVLO) can be digitally programmed. The UVLO disables the device when a too low input voltage is present.
- **Thermal protection:** The maximum temperature is exceeded, the device stops operation. When the re-enabling temperature is reached,
- **Short circuit proof:** The output of the converter can be shortcircuited without problems for infinite time.
- **Open circuit proof** The output may be operated in open circuit for infinite time.
- **Input TVS diode** The converter features an input TVS diode for protection.

## 1.4 Output Power

The maximum output power is limited by the case power dissipation. The maximum continuous recommended output power is denoted in the specification table. It should be verified in the application. In case the output power is too high, the DC/DC converter will shut down in thermal protection.

## 1.5 Safety Advice / Risk of Damage

To prevent potential damage, ensure that the output and input connections of the CCCV48XX are not interchanged. Carefully verify the wiring before applying power.

## 1.6 Ordering Information

Ordercode	Description	EAN
CCCV4824	Output Voltage $U_{out} = 24\text{ V}$	4262542250084
CCCV4812	Output Voltage $U_{out} = 12\text{ V}$	4262542250077
CCCV4805	Output Voltage $U_{out} = 5\text{ V}$	4262542250053
Custom output voltages and currents available! Contact DPS.		



## 2 Pinout

The pinout of the CCCV48XX is depicted in Figure 2.

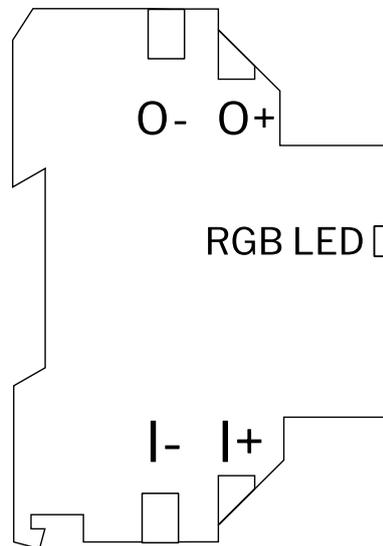


Figure 2: CCCV48XX connection diagram

### 2.1 Pin description

Pin	Functional description
<b>Input</b>	
I-	Negative Input Pin
I+	Positive Input Pin
<b>Output</b>	
O-	Negative Output Pin
O+	Positive Output Pin

### 2.2 RGB LED Color Codes

Color	Functional State	Power
Green	Operation in Constant Voltage Mode	OK
Yellow	Operation in Constant Current Mode	OK
Purple	Input Voltage too low (UVLO)	Not OK
Blue	Overtemperature protection engaged	Not OK
Red	Control out of range	Not OK





### 3 Specification

The specification is shown in the following table. If not otherwise specified the following parameters have been used:  $T_{amb}=25^{\circ}\text{C}$  and  $U_{in}=30\text{ V}_{dc}$ .

	Min	Typ	Max	Unit
<b>Eingang</b>				
<b>Input</b>				
Eingangsspannung Input Voltage	8		50	$V_{dc}$
Sicherungstyp Fuse Type	4A (Type 2410-1400)			
Eingangskapazität Input Capacitance		16		$\mu\text{F}$
Schutzmosfet Eingang Input protection Mosfet	yes			
Unterspannungsschutz, programmierbarkeit Undervoltage configurable	yes for customized versions			
<b>Eingang Generell</b>				
<b>Output General</b>				
Regelstrategie Control Strategy	Constant Current Constant Voltage (CCCV)			
Spannung Output Voltage	0		50	$V_{dc}$
Spannung, max Output Voltage <sub>max</sub>	$0.9 U_{in}$			$V_{dc}$
Empfohlene Max Leistung Recommended Max Power cont.	20		40	W
<b>CCC4805</b>				
<b>CCC4805</b>				
Ausgangsspannung $I_{Load}=0$ Output Voltage $I_{Load}=0$	4.7	5.0	5.5	$V_{dc}$
Strom Peak Current Peak	0		4000	$\text{mA}_{dc}$
Strom Mittel Current Average		3000		$\text{mA}_{dc}$
Unterspannungsschutz, an Undervoltage Lockout on	8	8.5	9	$V_{dc}$
Unterspannungsschutz, aus Undervoltage Lockout off	7	7.5	8	$V_{dc}$





# CCCV48XX

Ultrathin 8.8mm 48V DIN Rail Constant Current Constant Voltage (CCCV)  
DC/DC converter

	Min	Typ	Max	Unit
<b>CCCV4812</b>				
Ausgangsspannung $I_{Load}=0$ Output Voltage $I_{Load}=0$	11.5	12	12.6	V <sub>dc</sub>
Strom Peak Current Peak	0		3000	mA <sub>dc</sub>
Strom Mittel Current Average		2000		mA <sub>dc</sub>
Unterspannungsschutz, an Undervoltage Lockout on	13	13.5	14	V <sub>dc</sub>
Unterspannungsschutz, aus Undervoltage Lockout off	12.5	13	13.5	V <sub>dc</sub>
<b>CCCV4824</b>				
Ausgangsspannung $I_{Load}=0$ Output Voltage $I_{Load}=0$	23.3	24	25.3	V <sub>dc</sub>
Strom Peak Current Peak	0		2000	mA <sub>dc</sub>
Strom Mittel Current Average		1500		mA <sub>dc</sub>
Unterspannungsschutz, an Undervoltage Lockout on	25.5	26	26.5	V <sub>dc</sub>
Unterspannungsschutz, aus Undervoltage Lockout off	24.5	25	25.5	V <sub>dc</sub>
<b>Gehäuse</b> <b>Case</b>				
Montageform Mounting Type	Din Rail			
Breiteneinheiten Mounting Width	8.8			mm
Montagehöhe Mounting Height	Household Installation BOX			
<b>Programmierbarkeit</b> <b>Programmability</b>				
Interface Interface	Factory			
<b>Sicherheitsfeatures</b> <b>Safety Features</b>				
Verpolungsschutz Reverse polarity protection	yes			
Neg. Eingangsspannung Negative Reverse Voltage			- 50	V <sub>dc</sub>
Kurzschlusschutz Short circuit protection	yes			
Leerlaufschutz Open circuit protection	yes			





# CCCV48XX

Ultrathin 8.8mm 48V DIN Rail Constant Current Constant Voltage (CCCV)  
DC/DC converter

	Min	Typ	Max	Unit
Betriebsbedingungen Operating Conditions				
Temperaturbereich Temperature Range	-40		50	°C
Temperatur Derating Temperature Derating	Derating required			
Technische Merkmale Technical Characteristics				
Elektrolytkondensatoren Electrolytic Capacitors	No electrolytic capacitors			



## 4 Measurements

### 4.1 Efficiency $U_{in}=48V$

The efficiency for an input voltage of 48 V<sub>dc</sub> is plotted over the output current. Figure 3 shows the efficiency overview while the Figure 4 shows the zoomed efficiency.

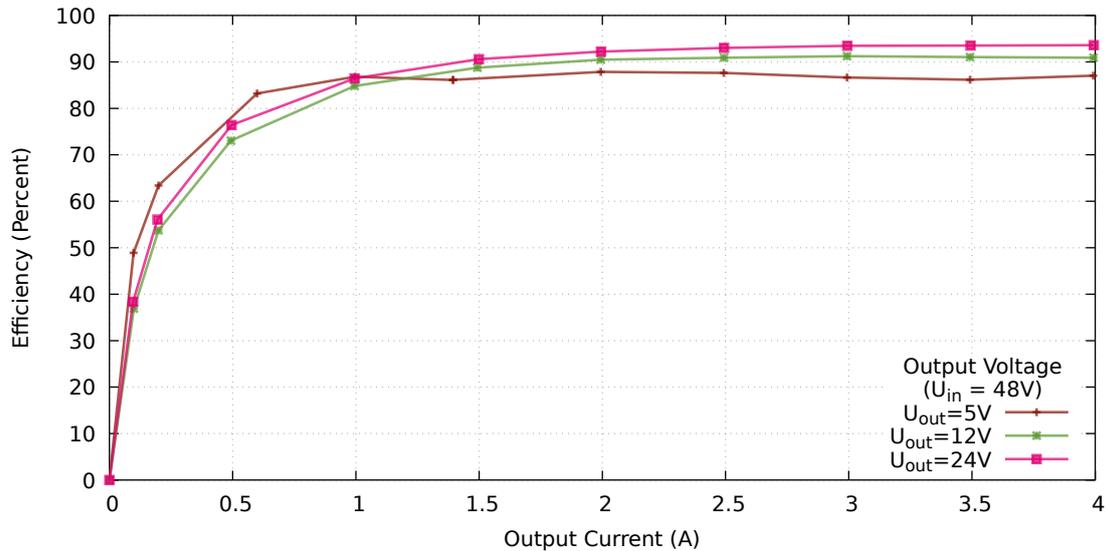


Figure 3: Efficiency in percent depicted over the output current.

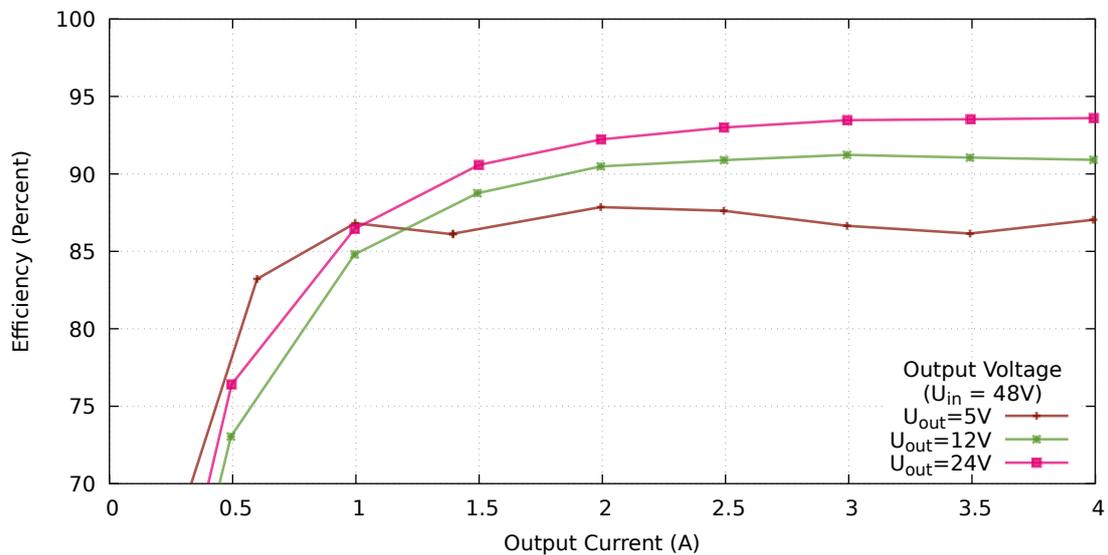


Figure 4: Zoomed Efficiency in percent depicted over the output current.



## 4.2 Losses $U_{in}=48V$

The losses over the output current are depicted in Figure 5.

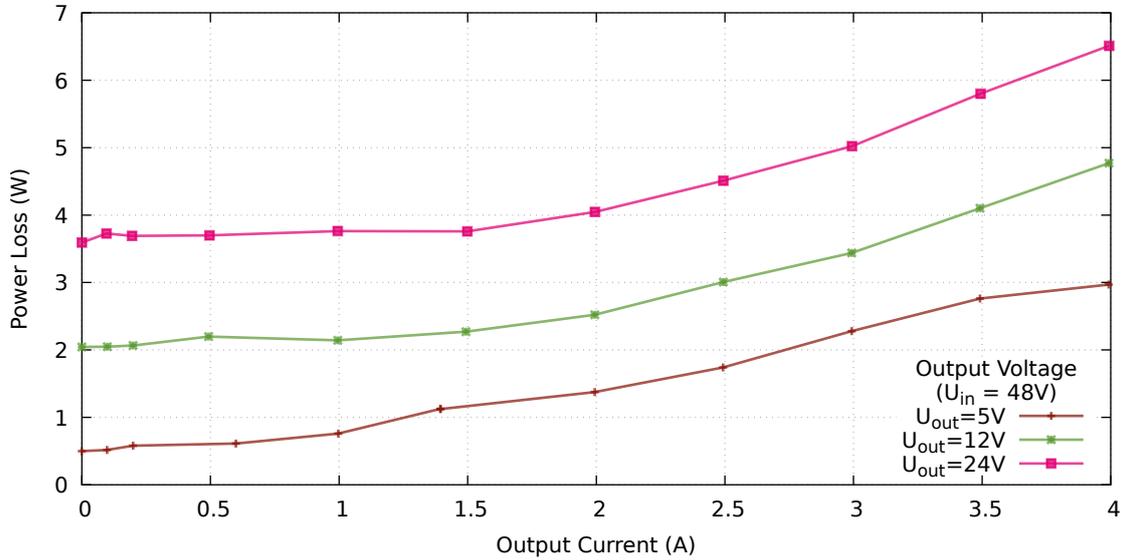


Figure 5: Losses over the output current.

## 4.3 Output Voltage Stability $U_{in}=48V$

The output voltage stability is depicted in Figure 6.

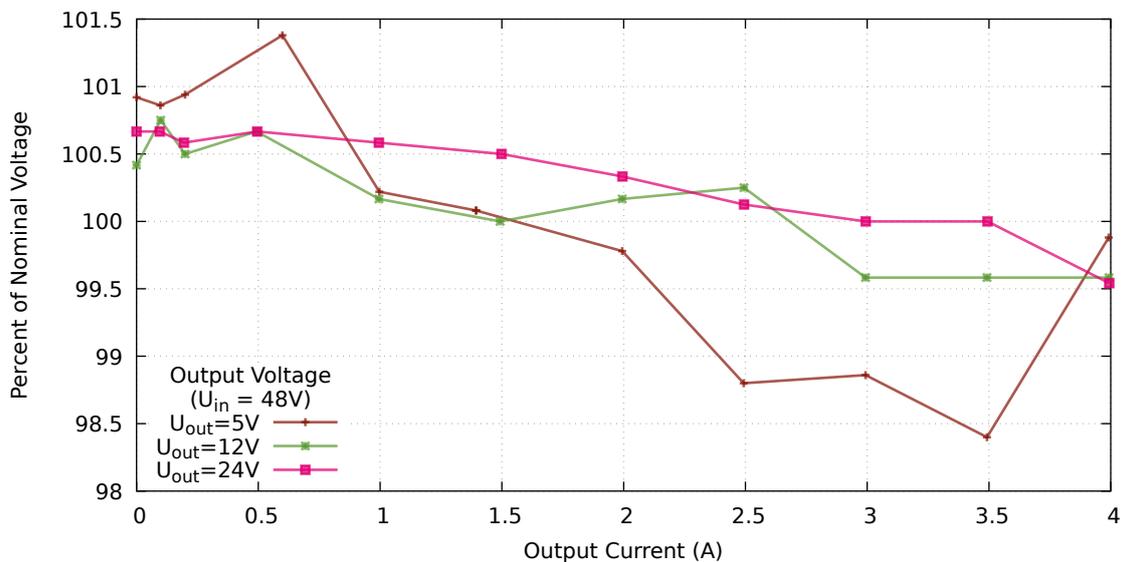


Figure 6: Losses over the output current.



## 4.4 Efficiency $U_{in}=24V$

The efficiency for an input voltage of 24 V<sub>dc</sub> is plotted over the output current. Figure 7 shows the efficiency overview while the Figure 8 shows the zoomed efficiency.

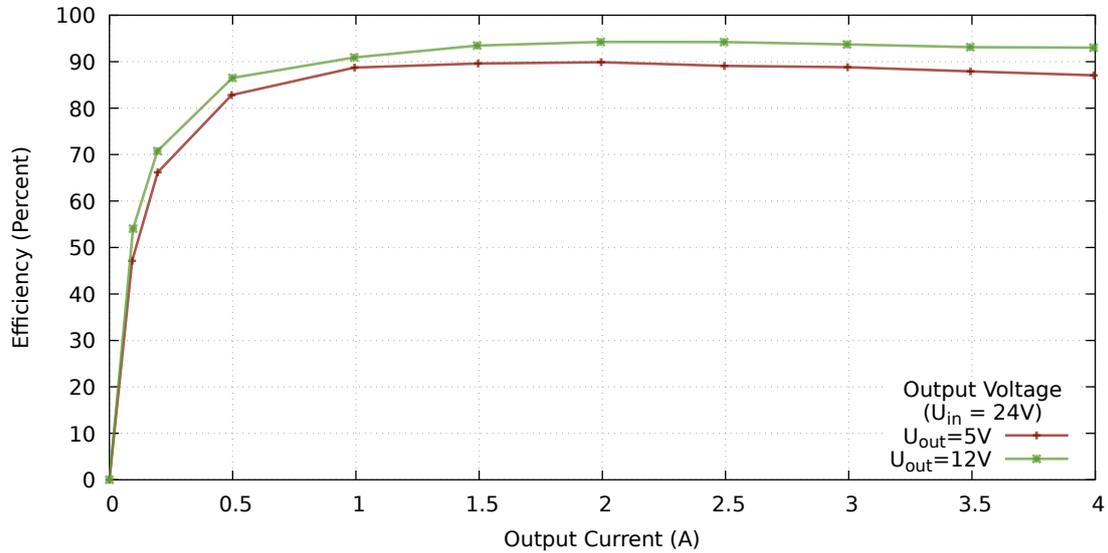


Figure 7: Efficiency in percent depicted over the output current.

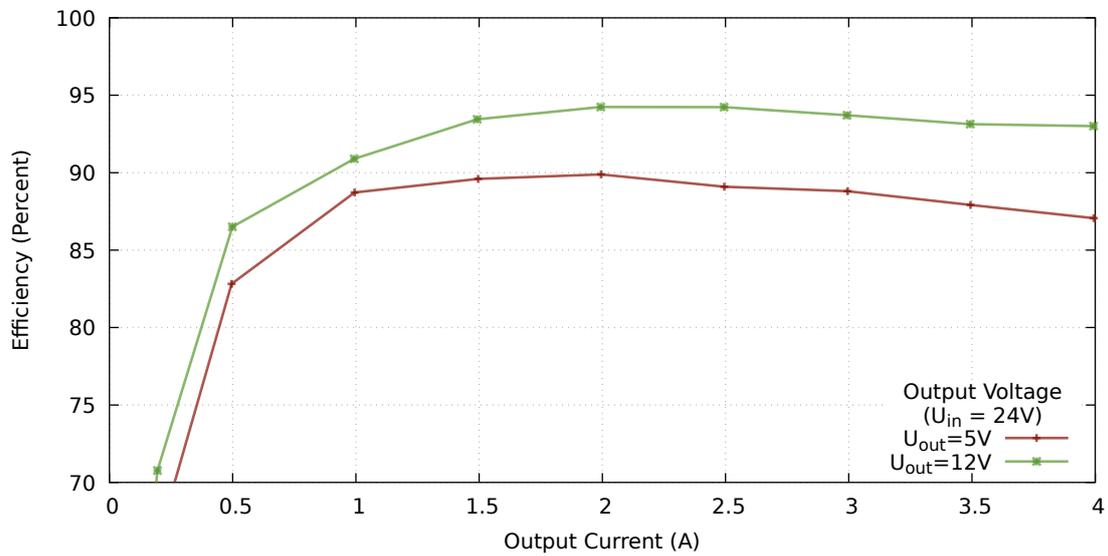


Figure 8: Zoomed Efficiency in percent depicted over the output current.



## 4.5 Losses $U_{in}=24V$

The losses over the output current are depicted in Figure 5.

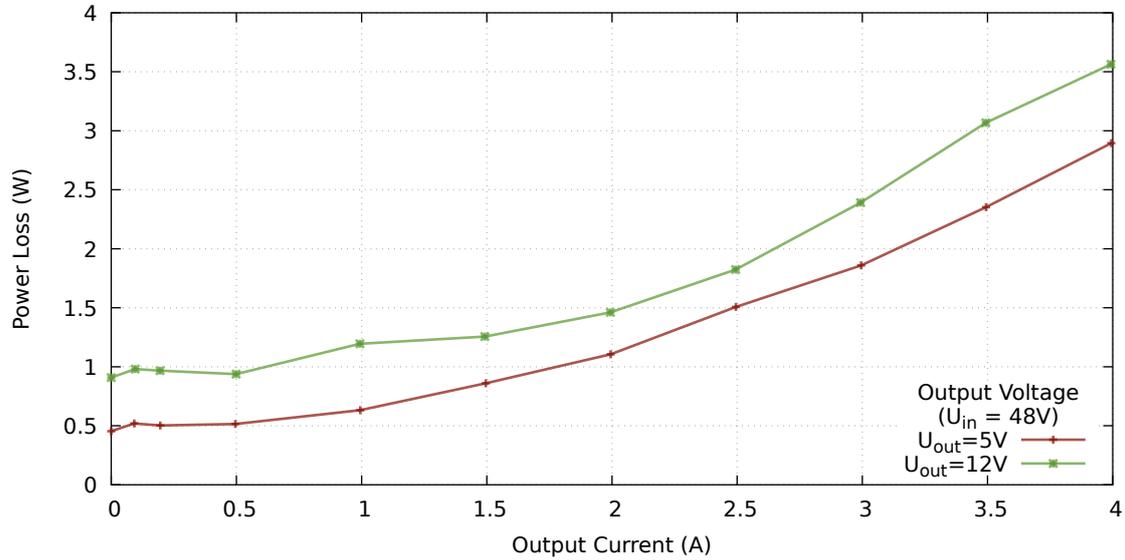


Figure 9: Losses over the output current.

## 4.6 Output Voltage Stability $U_{in}=24V$

The output voltage stability is depicted in Figure 10.

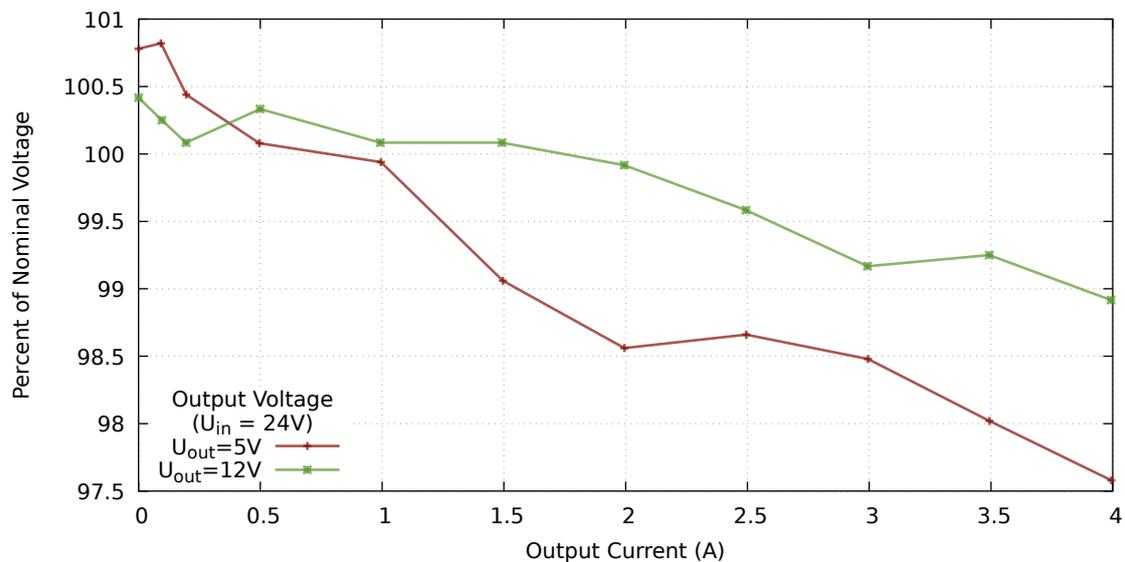


Figure 10: Losses over the output current.



## 4.7 Output Voltage Ripple

The output voltage ripple is measured at input voltage of 48 V.

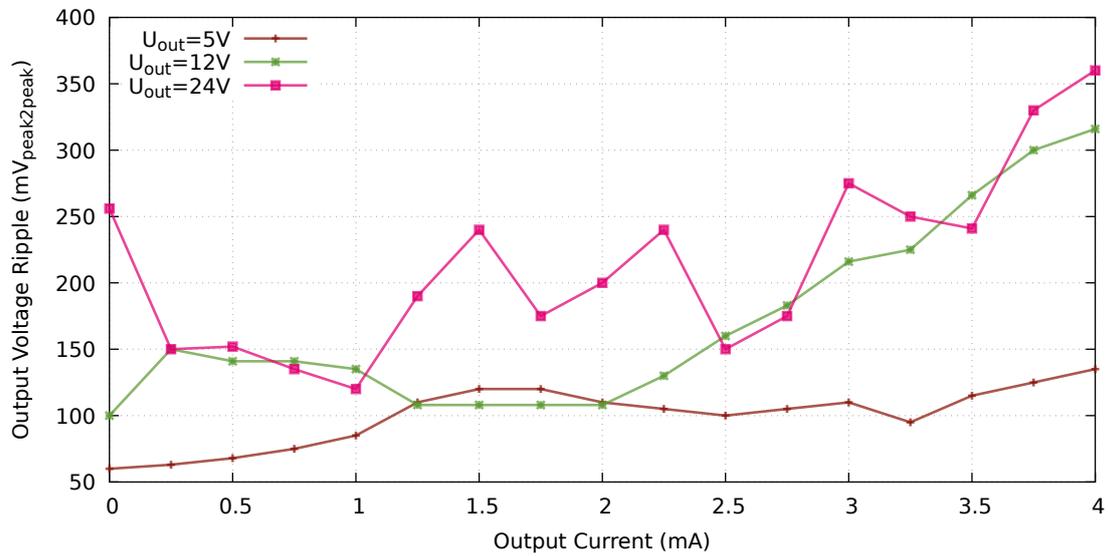


Figure 11: Output Voltage Ripple at U<sub>in</sub>=24V



## 4.8 Transient Response

The output transient response was measured at an Input Voltage of  $U_{in}=48 V_{dc}$ .

### 4.8.1 Output Voltage 5V

The output Voltage is set to 5V with the default parameters.

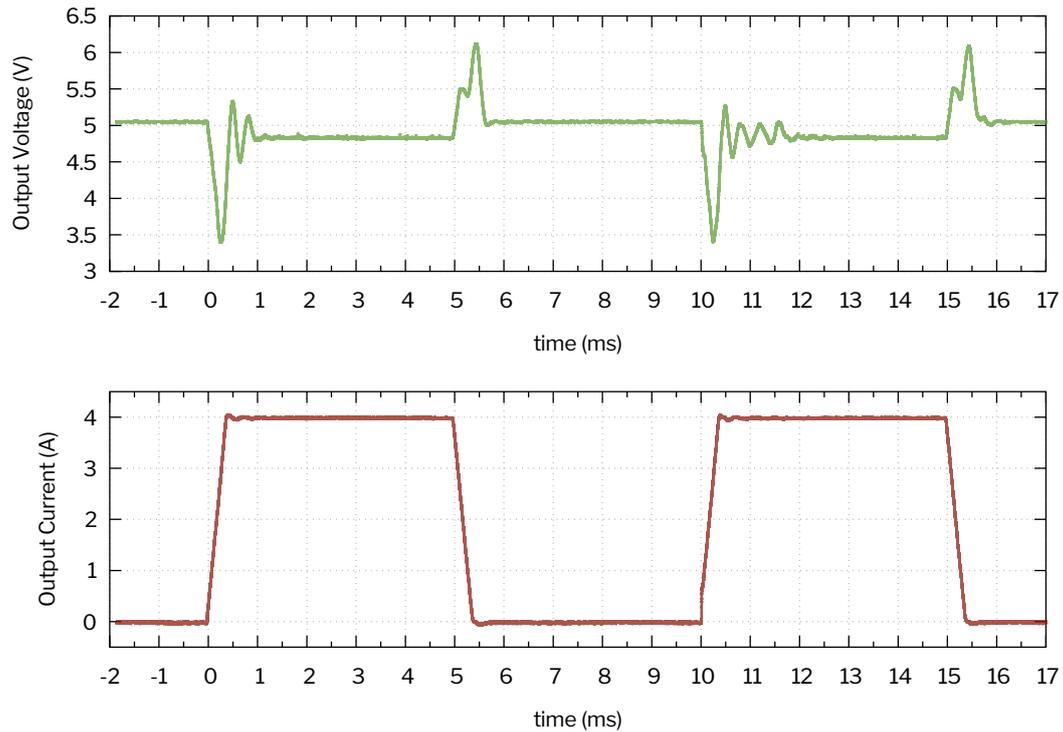


Figure 12: Transient Response  $U_{out}=15V$



## 4.8.2 Output Voltage 12V

The output Voltage is set to 12V with the default parameters.

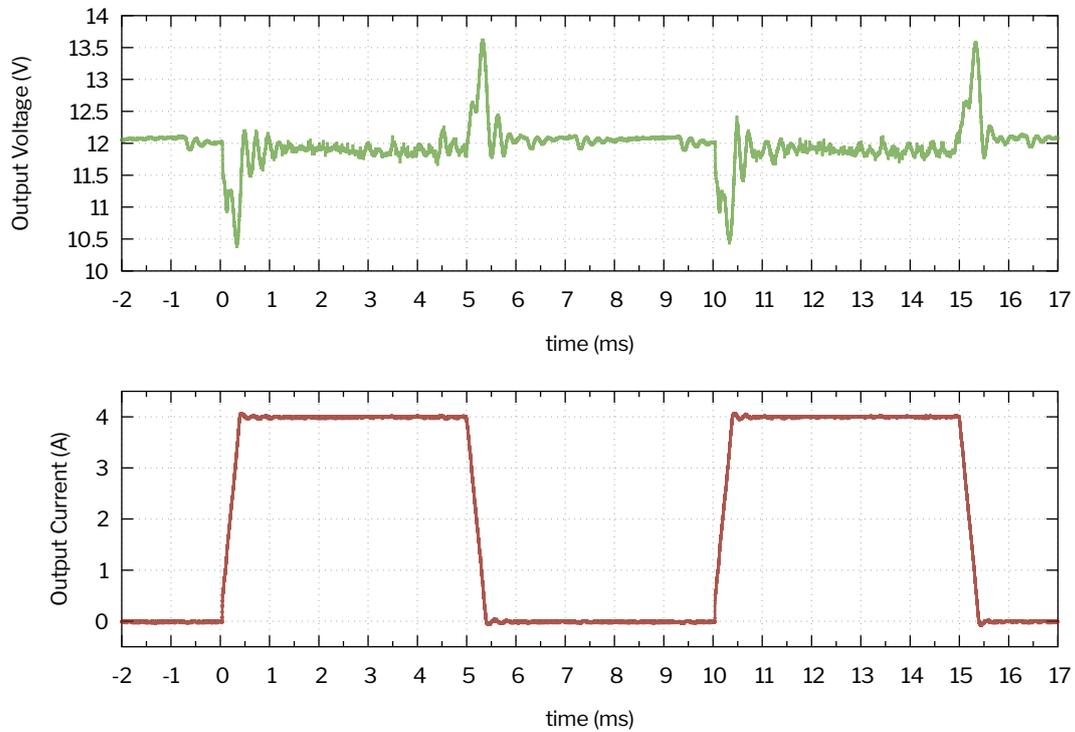


Figure 13: Transient Response  $U_{out}=12V$



### 4.8.3 Output Voltage 24V

The output Voltage is set to 24V with the default parameters.

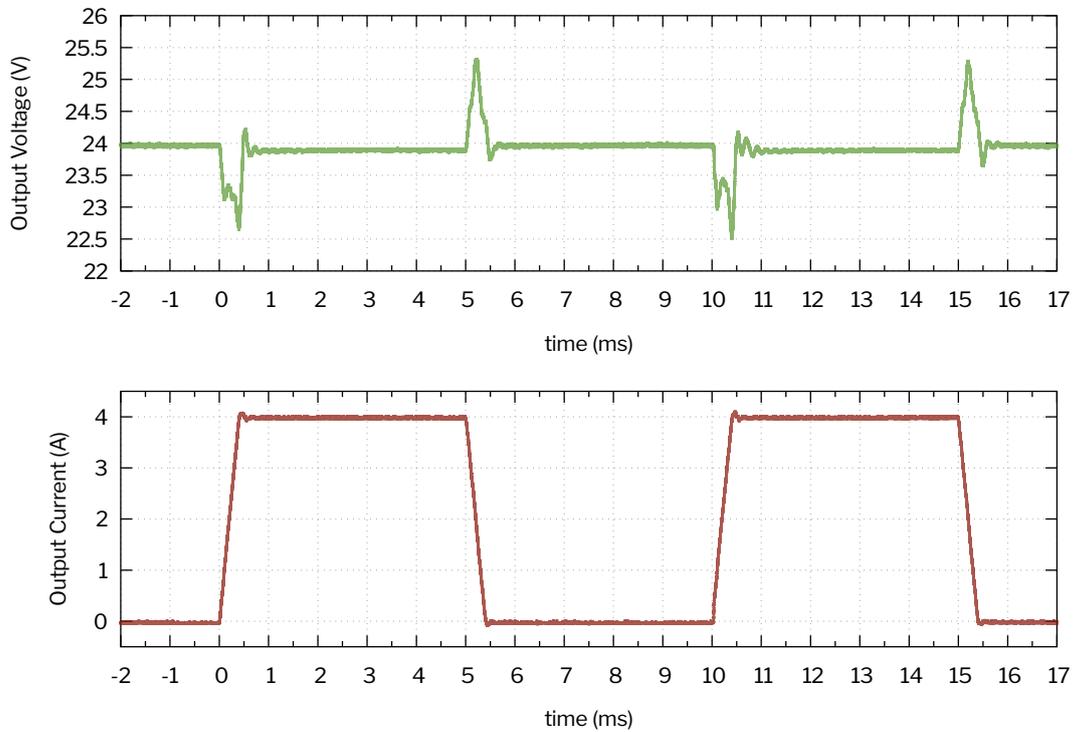


Figure 14: Transient Response  $U_{out}=12V$



## 5 EMC Measurements

### 5.1 Conducted Emissions (Line Input)

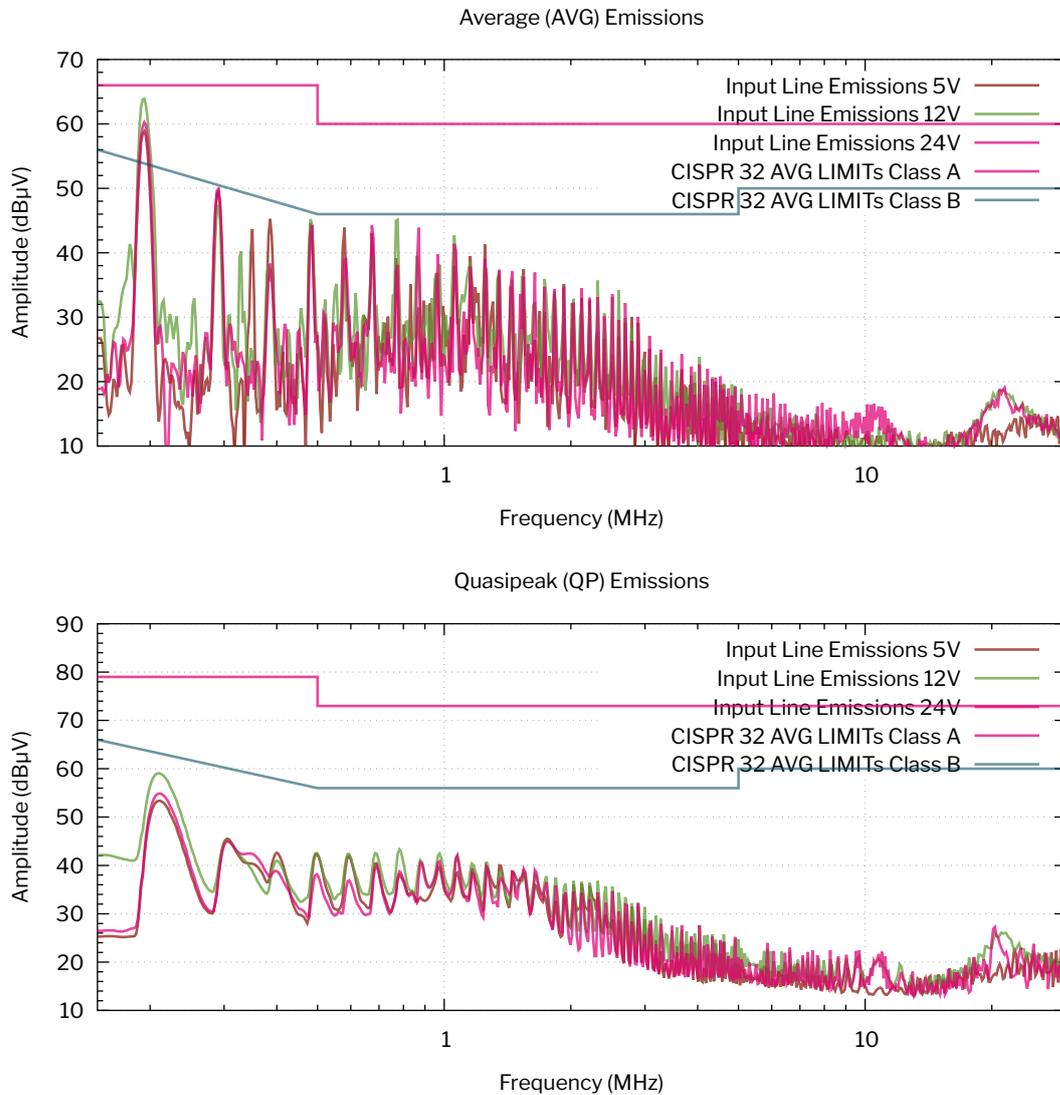


Figure 15: Conducted Line Emissions Input



## 5.2 Conducted Emissions (Line Output)

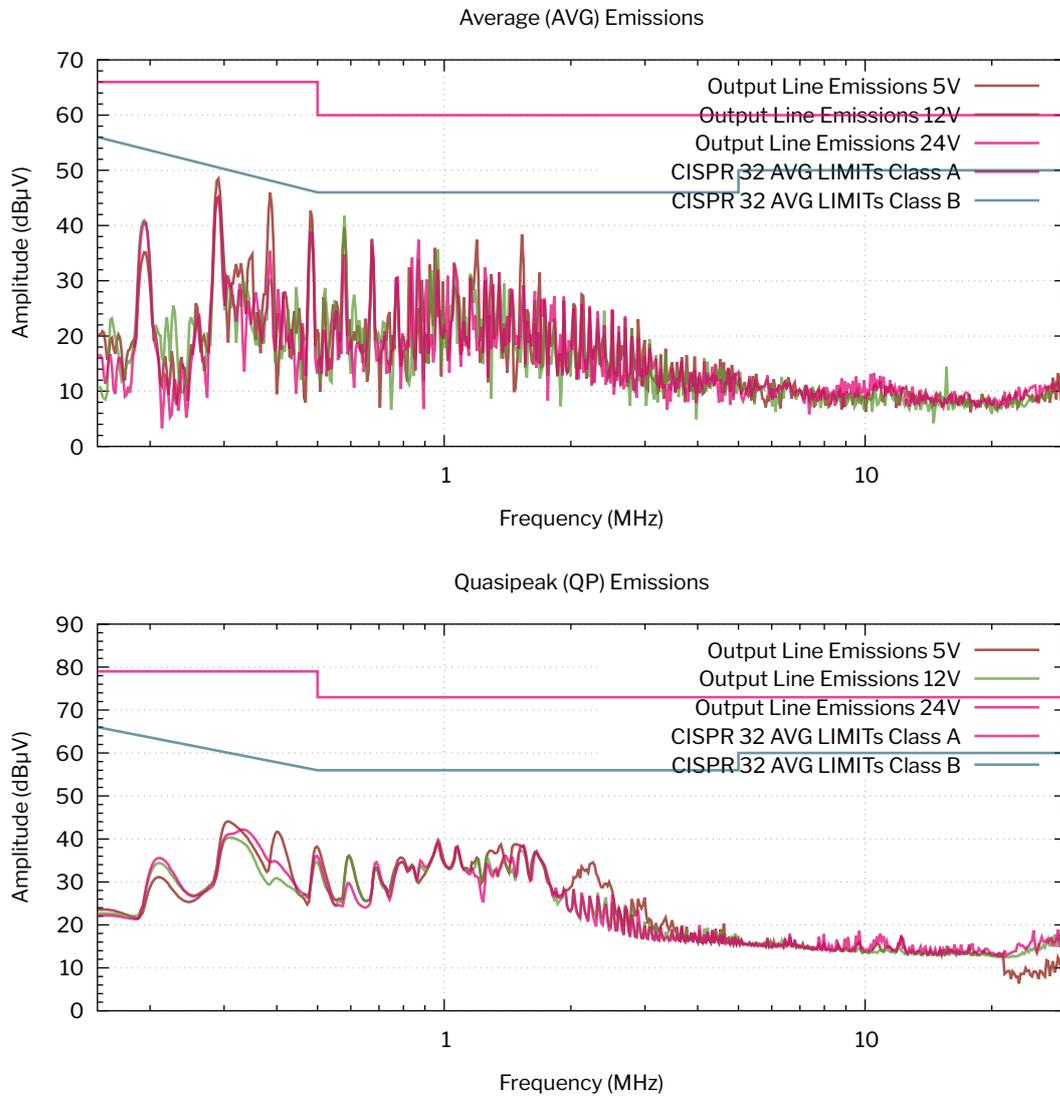


Figure 16: Conducted Line Emissions Output



## 6 Case

The case drawing is shown in Figure 17.

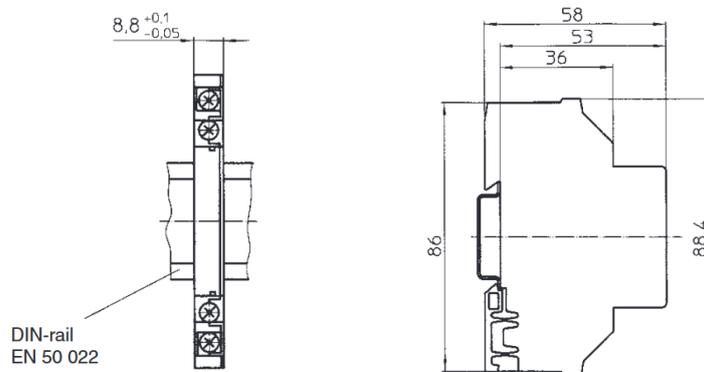


Figure 17: Product case.

### 6.1 Generation 1

The labels for the CCCV48XX are depicted in Figure 18.



(a) CCCV4805

(b) CCCV4812

(c) CCCV4824

Figure 18: Product labels of the CCCV series in different voltage variants.

### 6.2 Generation 2

The labels for the CCCV48XX are depicted in Figure 19.



(a) CCCV4805

(b) CCCV4812

(c) CCCV4824

Figure 19: Product labels of the CCCV series (Generation 2) in different voltage variants.





## 7 Document

### 7.1 Datasheet Quality

Digital Power Systems aims for the highest datasheet quality. We value your feedback to improve this document. Please email:

`datasheet (ät) digitalpowersystems (döt) eu`

### 7.2 Revision History

The revision history is depicted in the following table.

Date	Changes in Revision
9.1.2024	Datasheet released
7.2.2025	Clarified Output Specifications for CCCV4805, CCCV4812 and CCCV4824.
12.9.2025	Updated document design to latest version
12.9.2025	Clarified UVLO for individual CCCV48XX series
12.9.2025	Updated Labels with generation 2 labels, updated hero image
17.9.2025	Typo corrections with focus on device description

### 7.3 Contact Information

This is a product of the Digital Power Systems GmbH (DPS).

Digital Power Systems GmbH  
Haid- und Neu Str. 7  
76131 Karlsruhe, Germany

Visit our website: [www.digitalpowersystems.eu](http://www.digitalpowersystems.eu)

